


# HIGH-POWERED ATTENUATOR LINE

SERVING THE TELECOMMUNICATION AND TEST AND MEASUREMENT MARKETS, ONE CONNECTION AT A TIME

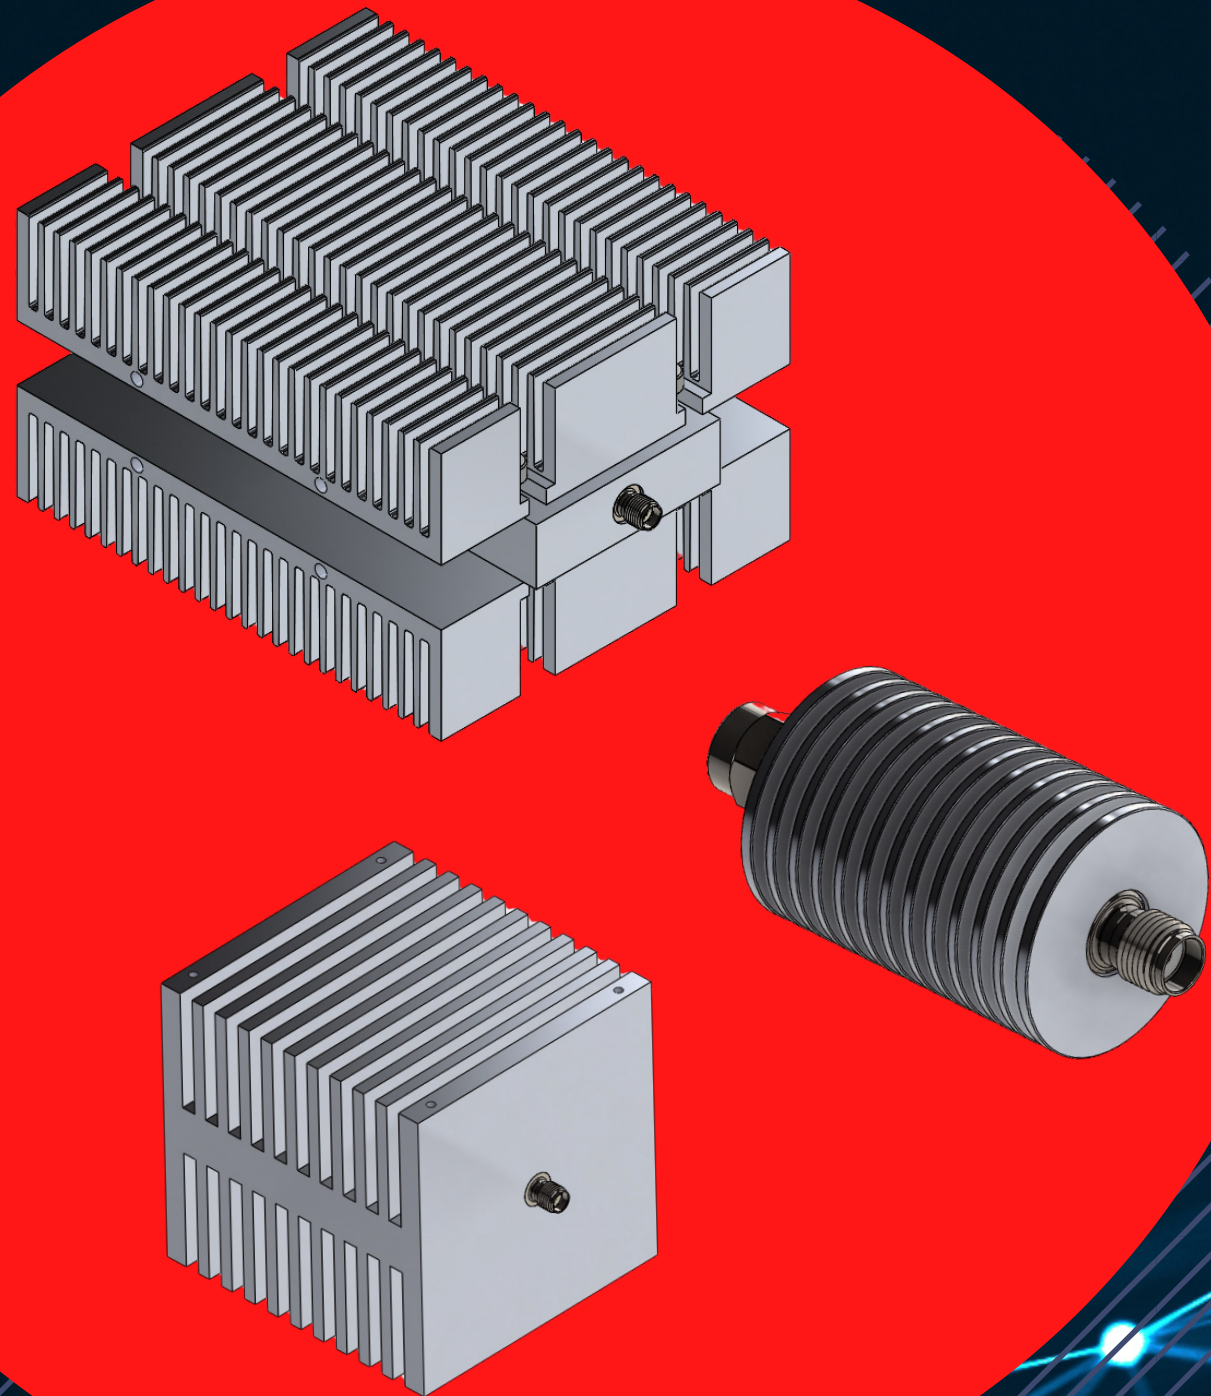

## QUICK FACTS

- 10, 25, 50, 100, 150W average power
- 2000W max power
- SMA & Type-N connectors
- DC-18GHz
- 50 Ohm impedance
- Rapid heat dissipation
- Standard dB values up to 60dB

## ABOUT THIS PRODUCT

XMA's high-powered attenuators are the solution for your telecommunication and testing needs. This product line handles average power values of 10, 25, 50, 100, and 150W, and can withstand up to 2000W. They are available from DC-18GHz and come in SMA and N connector types. These attenuators allow rapid heat dissipation and accommodate various mechanical fitting needs. They come in standard dB values up to 60dB, and all have an impedance of 50 Ohms. Our attenuators have been successfully implemented in the telecommunications industry and test and measurement setups.

Want to hear more? Contact us at  
[sales@xmacorp.com](mailto:sales@xmacorp.com)  
or call +1 (603) 222-2256.

