

5

4

3

2

1

SPECIFICATIONS

ELECTRICAL

FREQUENCY RANGE DC- 18GHz

ATTENUATION ACCURACY ACROSS FREQ. RANGE
01-06 dB ±0.30 dB
07-10 dB ±0.50 dB
11-20 dB ±0.75 dB
21-30 dB ±1.00 dB

VSWR
DC - 4 GHz 1.15:1 MAX
4 - 12.4 GHz 1.25:1 MAX
12.4 - 18 GHz 1.35:1 MAX

INPUT POWER 2 WATTS AVG. @ 25°C
DERATES LINEARLY TO 10% @ 125°C FROM 25°C

RF LEAKAGE/RFI >65 dBc (>90 dBc TYP.)

PEAK POWER 500 WATTS
(5 µ Sec PULSE WIDTH, .25% DUTY CYCLE)

IMPEDANCE 50 OHMS

OPERATING TEMP RANGE 4 KELVIN TO +125°C

MECHANICAL

CONNECTOR BODIES PASSIVATED STAINLESS STEEL
CENTER CONDUCTORS GOLD PLATED BERYLLIUM COPPER
INSULATORS PTFE (TEFLON) IAW ASTM-D1710
RESISTIVE ELEMENT THIN FILM ON CERAMIC RESISTIVE CIRCUIT

NOT A HERMETIC SEALED UNIT

ROHS COMPLIANT DEVICE

MATERIALS, ENVIRONMENTAL PERFORMANCE & FINISHES COMPLY TO MIL-DTL-3933


MARKING

PART LOOKS LIKE PRODUCT IMAGE ABOVE.
PART MARKING ORIENTATION AND FORMAT AS SHOWN.
MARKING TO BE AS LARGE AS POSSIBLE BE, CLEAR, READABLE.
"-dB" TO BE REPLACED WITH TWO DIGIT dB VALUE SPECIFIED ON WORK ORDER
YYWW = DATE CODE.



Table with 5 columns: REV, DESCRIPTION, ECO #, DATE, APPROVED. Row 1: - INITIAL RELEASE, 14-204, 8/19/14, T.KUHN

0dB - 12dB

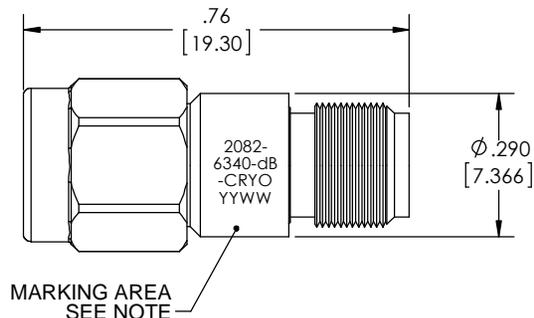

13dB - 30dB

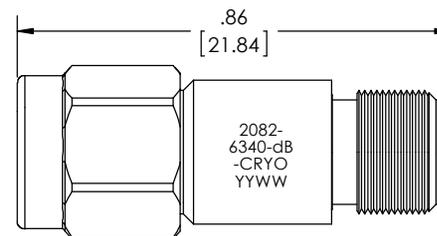


Table with 4 columns: QTY., PART NUMBER, DESCRIPTION, ITEM NO. Row 1: X, 2082-6340-dB-CRYO, ATTENUATOR, SMA-m/f, DC-18 GHz, 2 WATTS AVG, 500 WATTS PEAK. Row 2: 1, TA-2082-6340-dBU, ASSEMBLY, ATTENUATOR, SMA-m/f, DC-18 GHz, 2 WATTS AVG, 500 WATTS PEAK, UNMARKED, 1

Table with 2 columns: DIMENSIONS ARE IN INCHES AND APPLY BEFORE / AFTER PROCESSING. SURFACE ROUGHNESS µINCHES 63. FINISH: SEE NOTE. MATERIAL: SEE NOTE. NOTE: THIS DRAWING INCORPORATES THIRD ANGLE PROJECTION. INTERPRET IAW ANSI Y14.5-1982

Table with 2 columns: UNLESS OTHERWISE SPECIFIED TOLERANCES IN: DECIMALS INCH [MM]. .X* .05" [1.27]. .XX* .03" [.76]. .XXX* .010" [.25]. ANGLES ±0°30'. REMOVE ALL BURRS/SHARP W/ BREAK / R OF .003" TO .0005" UNLESS OTHERWISE NOTED DIAS CONCENTRIC <.003 T.I.R.. DO NOT SCALE PRINT

Table with 2 columns: DRAWN DATE MCCORMICK 8/18/14. CHECKED DATE MCCORMICK 8/18/14. ENG. APPR. DATE T.KUHN 8/18/14

XMA Omni Spectra logo. Phone: 603-222-2256 Fax: 603-222-2259 150 Dow Street, Manchester, NH 03101. TITLE: ATTENUATOR, SMA-m/f, DC-18 GHz, 2 WATTS AVG, 500 WATTS PEAK. SIZE B CAGE CODE 3HT76 DRAWING NUMBER 2082-6340-dB-CRYO REV - SCALE PLATED AREA SQ. IN SHEET 1 OF 1

5

4

3

2

1