

5

4

3

2

1

SPECIFICATIONS

ELECTRICAL

FREQUENCY RANGE _____ DC - 65 GHz
 INSERTION LOSS _____ 0.5 dB MAX
 VSWR _____ 1.35:1
 INPUT POWER (AVG. MAX.) _____ 2 W
 IMPEDANCE _____ 50 OHMS (NOM.)
 OPERATING/STORAGE TEMP. RANGE _____ -65 TO +125°C
 RF LEAKAGE _____ -70 dBc MIN


MATERIAL

HOUSING _____ PASSIVATED STAINLESS STEEL
 IAW ASTM-A484 & ASTM-A582
 ALLOY 303, COND A
 CONTACT _____ GOLD PLATED IAW MIL-PRF-39012
 BeCu
 DIELECTRIC _____ REXOLITE


RoHS COMPLIANT DEVICE

MARKING

TBD

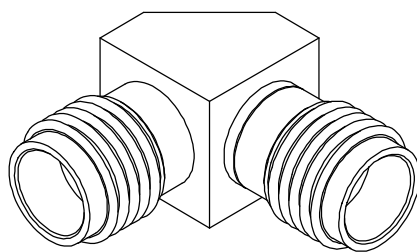

REVISIONS				
REV	DESCRIPTION	ECO #	DATE	APPROVED
X1	PRELIMINARY RELEASE	19-ER004	1/4/19	T.KUHN
X2	REVISED DIELECTRIC	19-ER004	1/25/19	T.KUHN

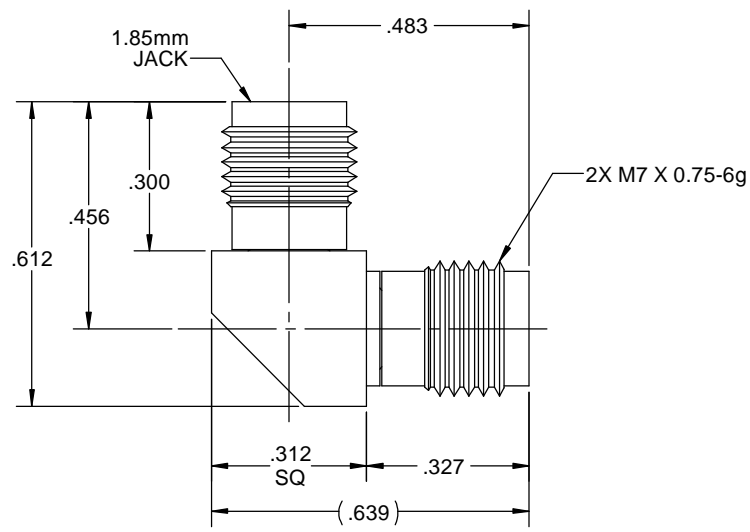

QTY.	PART NUMBER	DESCRIPTION	ITEM NO.
X	6780-5001-02	ADAPTER, 65 GHz, 1.85mm-f/f, 90° BEND	
1	TA-6780-5001-02U	ASSEMBLY, ADAPTER, 65 GHz, 1.85mm-f/f, 90° BEND, UNMARKED	1

DRAWING PRACTICES PER ANSI-Y-14.5 MIL-STD-100 & 1000
 DIMENSIONS ARE IN INCHES AND APPLY BEFORE / AFTER PROCESSING
 SURFACE ROUGHNESS μ INCHES **63**
 FINISH:
 SEE NOTE
 MATERIAL:
 SEE NOTE
 NOTE:
 THIS DRAWING INCORPORATES THIRD ANGLE PROJECTION.

 INTERPRET IAW ANSI Y14.5-1982

UNLESS OTHERWISE SPECIFIED TOLERANCES IN:
 DECIMALS INCH [MM]
 .X* .05" [1.27]
 .XX* .03" [.76]
 .XXX* .010" [.25]
 ANGLES $\pm 0^{\circ}30'$
 REMOVE ALL BURRS/SHARP W/ BREAK / R OF .003" TO .0005"
 UNLESS OTHERWISE NOTED DIAS CONCENTRIC <.003 T.I.R.
 DO NOT SCALE PRINT

DRAWN DATE
MCCORMICK 1/23/19
 CHECKED DATE
MCCORMICK 1/23/19
 ENG. APPR. DATE
T.KUHN 1/23/19

Phone: 603-222-2256 Fax: 603-222-2259
 7 Perimeter Road, Manchester, NH 03103

TITLE
ADAPTER, 65 GHz, 1.85mm-f/f, 90° BEND

SIZE B	CAGE CODE 3HT76	DRAWING NUMBER 6780-5001-02	REV X2
SCALE	PLATED AREA SQ. IN	SHEET 1 OF 1	

5

4

3

2

1